OFF GRID AUTHORITY

ONE-PAGE SOLAR WIRING PLAN

PROJECT B003954830

FREE DIAGRAM

ARRAY	SYSTEM	BATTERY	INVERTER
1200 W | 2S2P	24 V DC	2S3P | 600 Ah	1200 W

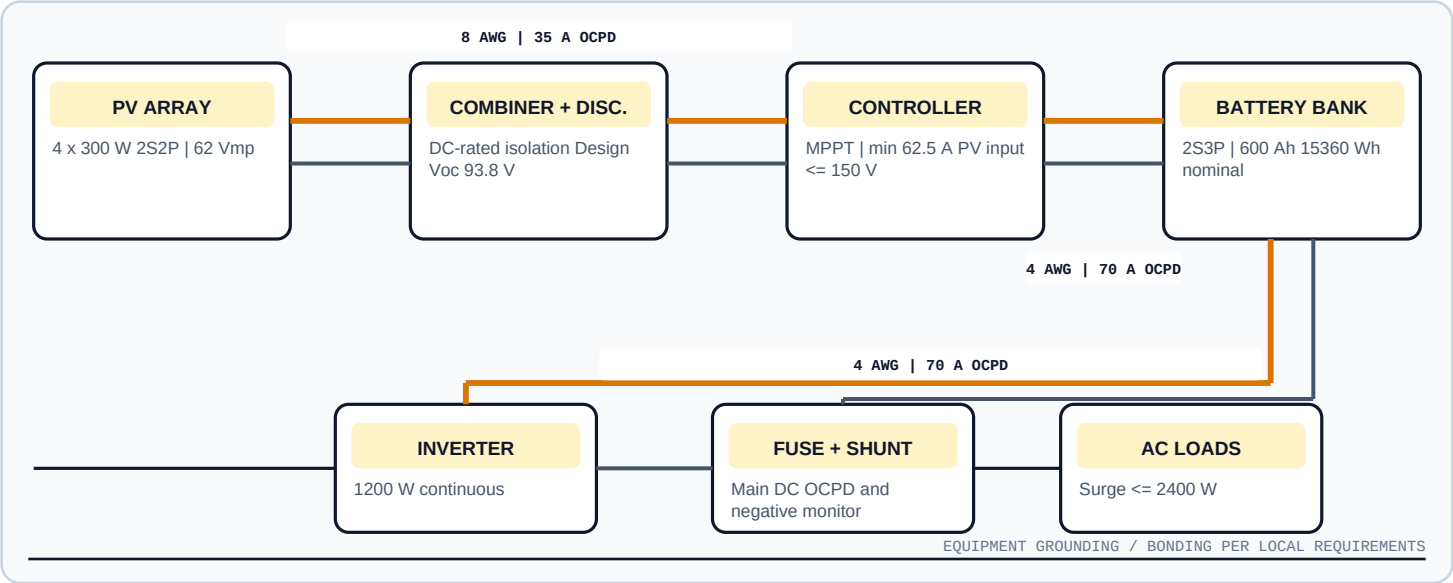

WIRE AND OCPD SCHEDULE

RUN	ONE-WAY	CONDUCTOR	CURRENT	DROP	OCPD
Array Controller	29 ft	8 AWG CU	31.5 A	2.29%	35 A
Controller Battery	5 ft	4 AWG CU	50 A	0.64%	70 A
Battery Inverter	3 ft	4 AWG CU	55.6 A	0.43%	70 A

PLANNING DOCUMENT - NOT A PERMIT SET

This conceptual plan is generated from the inputs shown. Verify equipment manuals, terminal temperature ratings, conductor insulation, environmental derating, local amendments, grounding, bonding, rapid shutdown, and permit requirements with the authority having jurisdiction before purchase or installation.

CALCULATION BASIS

NEC 2023 Table 310.16 (60 C column); Chapter 9 Table 8; 240.6(A); 690.7; 690.8. Design values do not replace adopted-code review.